



# 15'

# GUARDIAN

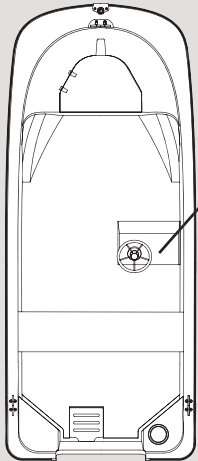

Alert Option  
Side Console

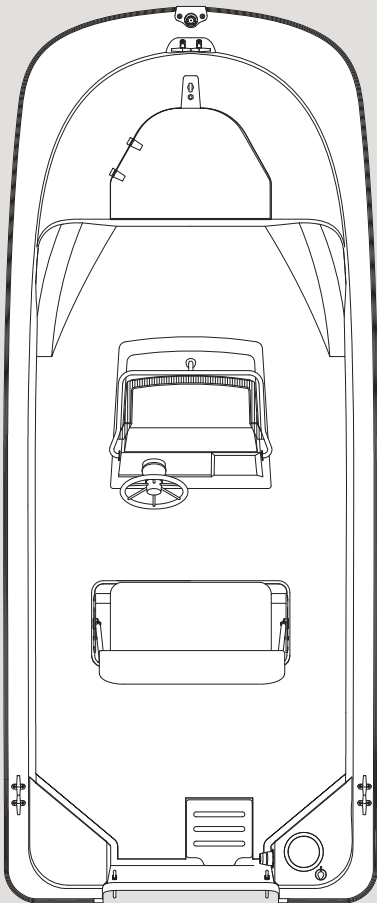

Don't be fooled by the appearance of the smallest fiberglass member of the BCGP fleet. This Whaler is every bit as tough as its bigger siblings. From its unsinkable Unibond™ construction to its reversible pilot seat, the 15' Guardian is ready for action. Nimble and easily trailerable, this boat is able to negotiate extremely skinny water without risk of puncture or deflation, making it well-suited for everything from flood rescues to utility work. Available in a center console or side console configuration. Shown with options.

## SPECIFICATIONS

|                     | US            | METRIC  |
|---------------------|---------------|---------|
| • LOA               | 15' 5"        | 4.69 m  |
| • Beam              | 6' 6"         | 1.98 m  |
| • Draft             | 7"            | .17 m   |
| • Weight            | 1050 lbs      | 476 kg  |
| • Max Weight        | 1400 lbs      | 635 kg  |
| • Swamped Capacity  | 2900 lbs      | 1315 kg |
| • Person Capacity   | 6             | –       |
| • Max Horsepower    | 60 hp         | 44 kW   |
| • Min Horsepower    | 40 hp         | 29 kW   |
| • Max Engine Weight | 305 lbs       | 138 kg  |
| • Transom Height    | 20"           | .50 m   |
| • Fuel Capacity     | Portable Tank |         |
| • Bridge Clearance  | 55"           | 1.39 m  |

## STANDARD FEATURES

- Unsinkable hull with commercial-grade fiberglass laminate
- Haze grey gelcoat
- Heavy-duty rub rail
- Black identification and trim markings
- Low profile G17 fiberglass console with storage area, dome light, windshield and grab rail
- Stainless steel steering wheel
- No feedback cable steering
- Fiberglass reversible pilot seat with cushion
- Bow storage locker with fiberglass cover
- Bow eye / lifting eye
- Stern eyes
- Navigation lights
- Fire extinguisher
- 8" cleats (3)
- Bilge pump with automatic float switch
- Switch panel – bilge / navigation lights and auxiliary (4)
- 10-year limited hull warranty

This is only a partial list of standard features. To see the complete list, please contact your sales representative. Specifications are approximate and subject to variance.