


32'

JUSTICE

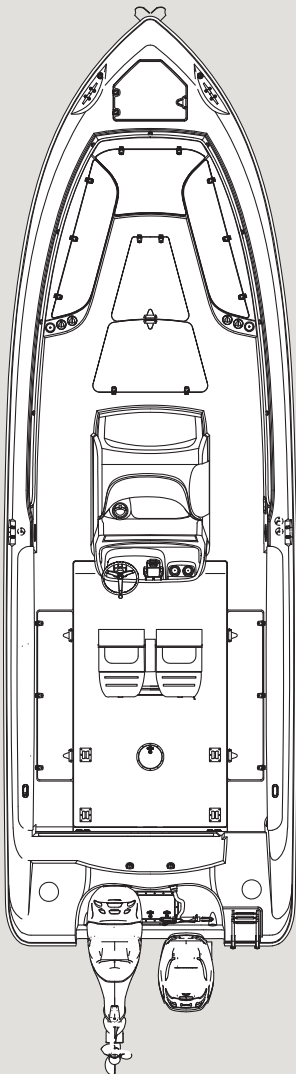

Even sitting still the 32' Justice just looks fast. The 32' features flip-up bolsters for comfortable operation even in the roughest conditions. Notable standard features include a hard top with electronics box and flood lights, electric trim tabs and shorepower. Shown with options.

SPECIFICATIONS

	<i>US</i>	<i>METRIC</i>
• LOA	32' 2"	9.80 m
• Beam	10' 2"	3.09 m
• Draft	22"	.55 m
• Weight	8500 lbs	3855 kg
• Max Weight	4300 lbs	1950 kg
• Swamped Capacity	4800 lbs	2177 kg
• Person Capacity	14	–
• Max Horsepower	600 hp	447 kW
• Min Horsepower	400 hp	298 kW
• Max Engine Weight	1400 lbs	635 kg
• Transom Height	30" d	.76 m
• Fuel Capacity	300 gal	1135 L
• Bridge Clearance	118"	2.99 m

STANDARD FEATURES

- Unsinkable hull with commercial-grade fiberglass laminate
- Self-bailing hull with scuppers
- Haze grey gelcoat
- Black identification and trim markings
- Heavy-duty rub rail
- Fiberglass console with storage area, dome light, storage drawers, molded tempered glass windshield, grab rail
- Welded stainless steel low-profile interior rail
- Stainless steel thru hull anchor roller davit
- Covered telescoping swim ladder with stainless steel grab rail
- Stainless steel grab rails
- Hard top with electronics box, life jacket storage
- Floodlights mounted on hardtop (3)
- Electric trim tabs
- 300-gallon fuel tank (2) 150-gallon port and starboard side
- Stainless steel steering wheel with turn knob
- Transducer mount areas
- Molded inner liner
- Opening porthole with screen
- Acrylic entry door with lock
- Molded console footrest
- Bow anchor locker
- Forward in-deck storage with hatch and drain
- Lockable forward storage — port and starboard
- Helm and companion bolster style seats with storage
- Forward deck seating
- In-deck bow storage with drain and bilge pump
- Bow eye / lifting eye
- Stern eyes
- 10" cleats (6)
- Navigation lights
- Fire extinguishers (3)
- Forward and aft bilge pumps with automatic floats
- 10-year limited hull warranty

This is only a partial list of standard features. To see the complete list, please contact your sales representative. Specifications are approximate and subject to variance.