


470

IMPACT



The 470 Impact is a fully-inflatable boat with interlocking aluminum floorboards. Speed tubes are standard equipment to ensure you get optimum top-end speed. Easily portable with quick planing characteristics, the 470 is designed to get you into and out of remote areas fast. Shown with options.

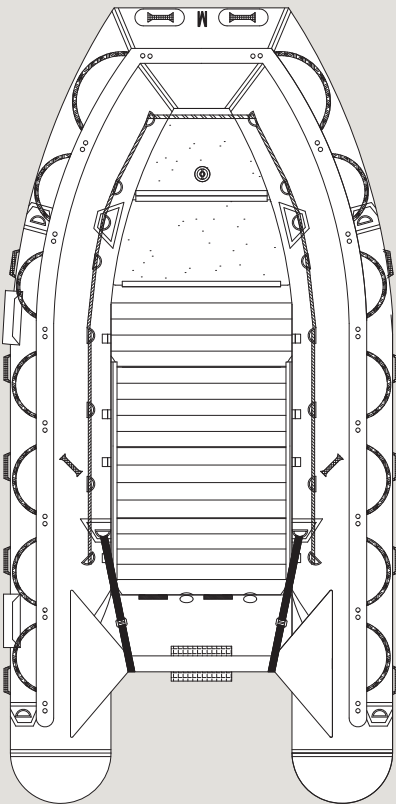

SPECIFICATIONS

	<i>US</i>	<i>METRIC</i>
• LOA	15' 5"	4.70 m
• Length Inside	11' 1"	3.39 m
• Beam	7' 7"	2.32 m
• Beam Inside	3' 7"	1.10 m
• Tube Diameter	2' 0"	0.61 m
• No. of Chambers	9	–
• Weight Capacity	1900 lbs	862 kg
• Person Capacity	7	–
• Recommended Horsepower	50 hp	37.3 kW
• Max Horsepower	60 hp	44.8 kW
• Min Horsepower	30 hp	22 kW
• Max Engine Weight	287 lbs	130 kg
• Total Boat Weight (excl. engine)	600 lbs	272 kg
Dimensions (Folded):		
• Length	5' 10"	1.78 m
• Width	2' 7"	0.80 m
• Height	1' 8"	0.50 m

STANDARD FEATURES

- Unique TriMAX hull (no center inflatable keel)
- Heavily reinforced Hypalon® speed tubes
- Commercial-grade floor system with (3) aft heavy-duty aluminum interlocking floorboards
- Rugged forward composite floorboards (2)
- Extra large flow self-bailers with elephant trunks (2)
- Heavy-duty inflation valves and pressure relief valves
- Heavy-duty rubbing strakes
- Flat rubbing strake under keel
- Triangle rubbing strakes under speed tubes
- Reinforced carrying handles
- Reinforced bow carrying handles
- Reinforced interior grab handles
- Interior tie down D rings (14)
- Internal lifeline
- External lifeline
- Reinforced bow and aft towing D rings
- Reinforced bow and aft lifting D rings
- Transom lifting points
- Hand bellows + hoses
- Tube repair kit
- Paddles with paddle sleeve sets (8)
- Bow, boat, floorboard bags

This is only a partial list of standard features. To see the complete list, please contact your sales representative. Specifications are approximate and subject to variance.