


# 520

# IMPACT



The 520 Impact features a solid fiberglass hull with molded-in non-slip texture to promote more secure footing. The hull bottom features a deep-V for a smooth ride and strakes to deflect spray and to enhance tracking. Standard features include internal and external lifelines, lifting handles, a built-in fuel tank and pressure relief valves to prevent over-inflation. Shown with options.

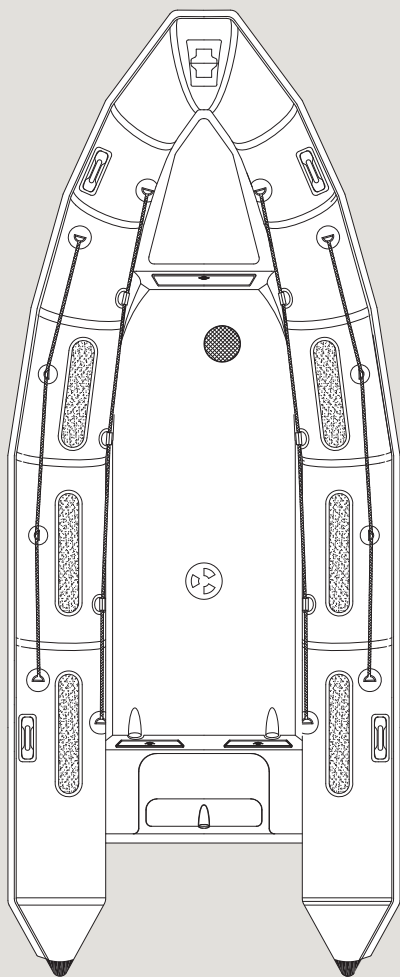

## SPECIFICATIONS

	US	METRIC
• LOA	17' 1"	5.20 m
• Length Inside	12' 4"	3.75 m
• Beam	7' 3"	2.22 m
• Beam Inside	3' 9"	1.15 m
• Tube Diameter	1' 8"	0.50 m
• No. of Chambers	5	–
• Weight Capacity	2160 lbs	980 kg
• Person Capacity	8	–
• Recommended Horsepower	80 hp	58.8 kW
• Max Horsepower	100 hp	73.5 kW
• Min Horsepower	40 hp	29.4 kW
• Max Engine Weight	462 lbs	210 kg
• Total Boat Weight (excl. engine)	1061 lbs	481 kg
Dimensions (Packed):		
• Length	15' 8"	4.77 m
• Width	5' 11"	1.80 m
• Height	3' 1"	0.94 m
• Fuel Capacity	19 gal	73 L

## STANDARD FEATURES

- Heavy-duty fiberglass hull
- Commercial-grade tubes made with exclusive polyurethane fabric
- Heavy-duty inflation valves and pressure relief valves
- Non-slip molded into gel coated deck and applied to tubes
- Haze gray gelcoat
- Heavy-duty rubbing strake
- Cleats (4)
- Bow lifting eyes
- Bow locker
- Drain valves
- External lifelines
- Hull drain socket
- Internal lifelines
- Lifting handles
- Mooring eye
- Safety relief valves
- Stern lifting / towing points
- Tube reinforcements
- Under-deck fuel tank
- Air pump
- Automatic electric bilge pump
- Telescopic paddles (2)
- Tube repair kit

This is only a partial list of standard features. To see the complete list, please contact your sales representative. Specifications are approximate and subject to variance.