


650

IMPACT



Boasting exceptional offshore performance, the 650 features a deep-V fiberglass hull with molded-in non-slip for more secure footing. In addition to contributing to a smooth ride, the deep-V design also results in a spacious below deck storage area and room for a 79-gallon fuel tank. Shown with options.

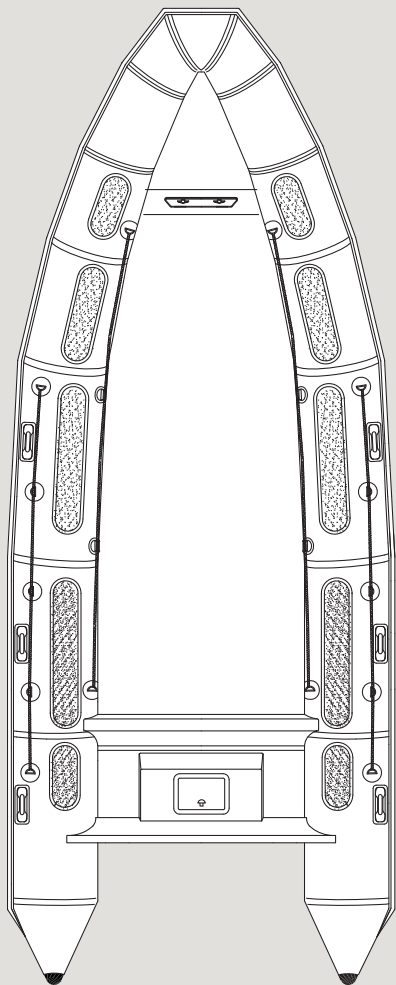

SPECIFICATIONS

	US	METRIC
• LOA	21' 4"	6.50 m
• Length Inside	16' 9"	5.10 m
• Beam	8' 2"	2.50 m
• Beam Inside	4' 6"	1.38 m
• Tube Diameter	1' 10"	0.56 m
• No. of Chambers	5	–
• Weight Capacity	3200 lbs	1451 kg
• Person Capacity	12	–
• Recommended Horsepower	115 hp	84.6 kW
• Max Horsepower	230 hp	171.5 kW
• Min Horsepower	100 hp	73.5 kW
• Max Engine Weight	1095 lbs	497 kg
• Total Boat Weight (excl. engine)	1845 lbs	837 kg

Dimensions (Packed):

• Length	18' 10"	5.75 m
• Width	7' 7"	2.30 m
• Height	4' 11"	1.50 m
• Fuel Capacity	79 gal	300 L

STANDARD FEATURES

- Heavy-duty fiberglass hull
- Commercial-grade tubes made with exclusive polyurethane fabric
- Heavy-duty inflation valves and pressure relief valves
- Non-slip molded into gel coated deck and applied to tubes
- Haze gray gelcoat
- Heavy-duty rubbing strake
- Cleats (6)
- Bow lifting eyes
- Bow locker
- Elephant trunk
- Elephant trunk deck drains
- External lifelines
- Hull drain socket
- Internal lifelines
- Lifting handles
- Mooring eye
- Safety relief valves
- Stern lifting / towing points
- Tube reinforcements
- Under-deck fuel tank
- Wide hold below deck
- Air pump
- Automatic electric bilge pump
- Telescopic paddles (2)
- Tube repair kit

This is only a partial list of standard features. To see the complete list, please contact your sales representative. Specifications are approximate and subject to variance.