


750

IMPACT



With a maximum horsepower of 300 and a 157-gallon fuel capacity, the 750 Impact outboard model is designed to get you there—and fast. The 750 is an extremely versatile platform available with many options so you can customize it to your specific needs. Shown with options.

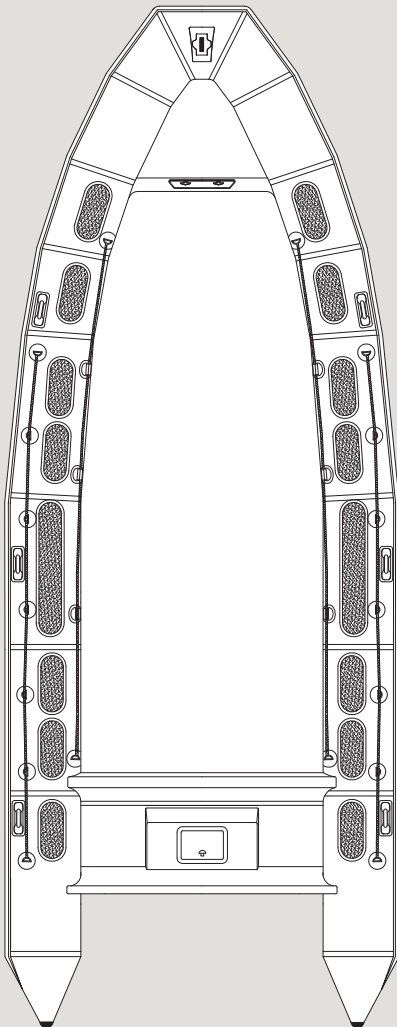

SPECIFICATIONS

	US	METRIC
• LOA	24' 7"	7.49 m
• Length Inside	19' 8"	6.0 m
• Beam	10' 1"	3.07 m
• Beam Inside	6' 4"	1.93 m
• Tube Diameter	1' 10"	0.56 m
• No. of Chambers	5	–
• Weight Capacity	3597 lbs	1632 kg
• Person Capacity	15	–
• Recommended Horsepower	250 hp	147.1 kW
• Max Horsepower	300 hp	220.6 kW
• Min Horsepower	200 hp	186.4 kW
• Max Engine Weight	1040 lbs	472 kg
• Total Boat Weight (excl. engine)	2734 lbs	1243 kg
Dimensions (Folded):		
• Length	21' 4"	6.50 m
• Width	7' 10"	2.38 m
• Height	4' 11"	1.50 m
• Fuel Capacity	157 gal	594 L

STANDARD FEATURES

- Heavy-duty fiberglass hull
- Commercial-grade tubes made with exclusive polyurethane fabric
- Heavy-duty inflation valves and pressure relief valves
- Non-slip molded into gel coated deck and applied to tubes
- Haze gray gelcoat
- Heavy-duty rubbing strake
- Handles (2)
- Bow locker
- Elephant trunk deck drains
- External lifelines
- Hull drain plug
- Internal lifelines
- Lifting handles
- SS bow / stern eyes
- Safety relief valves
- Tube reinforcements
- Under-deck fuel tank
- Below-deck storage
- Manual collar pump
- Automatic electric bilge pump
- Tube repair kit

This is only a partial list of standard features. To see the complete list, please contact your sales representative. Specifications are approximate and subject to variance.